

NORSHIELD

ASSA ABLOY

Experience a safer
and more open world


SDR MAX LITE SECURITY DOOR

Data Center Operations

The all-new SDR Max Lite LIGHTWEIGHT & HIGH SECURITY

- **Smooth, dependable, high-security protection.** Door is automatically locked and deadlocked upon closing, ready to protect from forced entry, ballistic or blast threats.
- **Lightweight and multiple threat resistant.** Typical door leaf weighs 300# (136kg) but provides high levels of protection against unauthorized entry, physical assault, handguns, and explosive events.
- **Multipoint auto-locking.** Secures 3 stainless steel locking points with 1" projection automatically when closed. Mechanical restraint holds bolts in the open position throughout the door swing, releasing only when the door has closed.
- **Surface-mounted multipoint lock** is all stainless steel construction and provides an economical, high-security solution to safeguard facilities, staff and intellectual property.
- **Available in manual and electronic access versions.** Panic or lever handle exit options, exit only or exterior lever handle, ADA compliant, local and remote access options.
- **Single point lock retraction & deadlock from threat side** Single motion exit meets requirements for fire and emergency egress. Certified Life-safety device under UL305.
- **Forced Entry tested to ASTM F3038-14** (5 & 15 minute)
- **Tested to .44 Magnum ballistic standards** UL752 Level 3, NIJ Level IIIA and ASTM F1233 HG4.
- **Blast-resistant design** meets requirements for both positive and negative pressure (rebound) protection during a blast event per ASTM F2927-21.

SDR MAX LITE

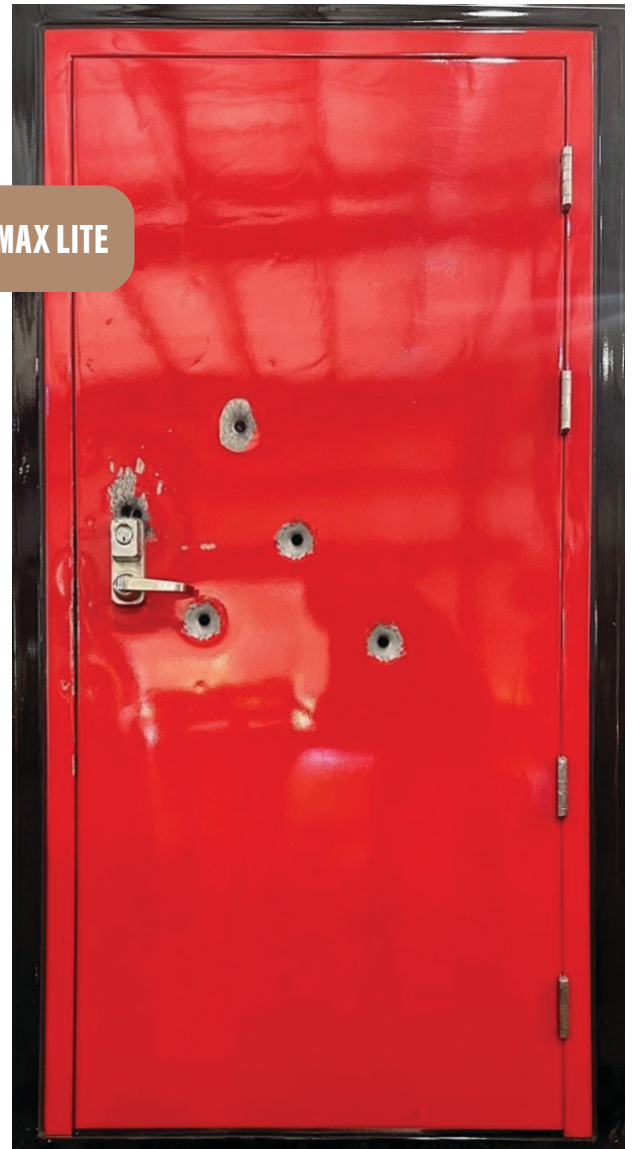


The ASSA ABLOY Group is the global leader in access solutions. Every day we help people feel safe, secure and experience a more open world.


Series SDR MAX LITE

Industry-leading security features and design flexibility.



- 1" throw 304 stainless steel bolts with mechanical deadlock and single motion retraction for egress.
- Armored exterior key cylinder for manual entry and optional electric access control.
- Adjustable mechanical trigger at center module with infinite restraint.
- Robust cast and machined components with rack and pinion mechanism ensures long-term reliability and consistent function.
- Optional surface-mounted hinge bolts for 5-point protection.
- Lightweight reinforced hollow metal door & frame. 3'x7' leaf weighs 300# (136kg).
- .44 Magnum ballistic resistance & ASTM F3038 forced entry resistance (5 & 15 minutes)
- ASTM F2927 blast resistance to 10 psi @ 89 psi-msec

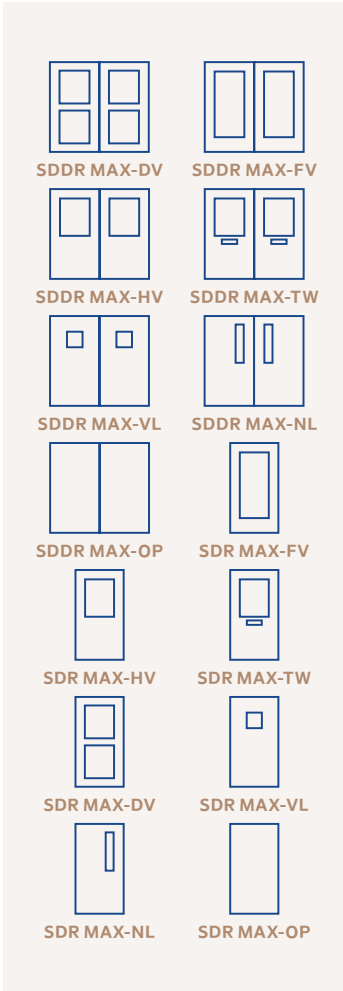

NORSHIELD PRODUCT		BALLISTIC RATINGS		NORSHIELD PRODUCT		FORCED ENTRY RATINGS	
				SDR MAX LITE			
UL 752	3			ASTM F3038	5	15	
	.44 MAG 3 SHOTS				5 MINUTE	15 Minute	
NIJ 0108.1	IIIA			<div>Scan for more details on this and other Norshield products.</div> 			
	.44 MAG – 5 SHOTS						
ASTM F1233	HG4						
	.44 MAG 3 SHOTS						